

GENERAL DATASHEET

ALINA NOVA



TECHNICAL DESCRIPTION

Alina Nova luminaires. Direct or Direct-Indirect light distribution. Diffuser with Lenses available. Mounting type is Multi-Point Pendant. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K or Tunable White (2700–6500K). Binning $\leq$ MacAdam 3. Color rendering CRI>80, CRI>90.

PROFILES

Profile size (width x height): 35x75 mm

LIGHT

Luminaire type: LED

Diffuser: Lenses

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 50°

Color Temperature: 2700K, 3000K, 4000K, Tunable White

DIMENSIONS

Outer Length	Total Power	Total Light Output
845 mm	21 W	1869 lm
1122 mm	28 W	2492 lm
1400 mm	35 W	3115 lm
1680 mm	42 W	3738 lm

LUMINAIRE BODY


Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

ELECTRICAL

Voltage: AC (230 volts)

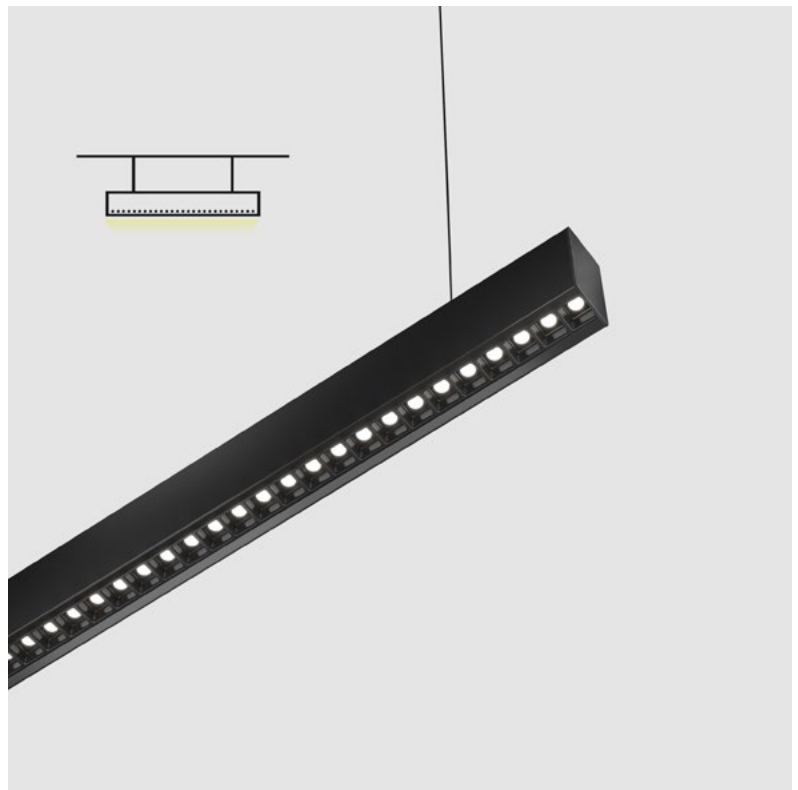


BODY COLOR OPTIONS



LIGHTING TYPES



MOUNTING TYPES

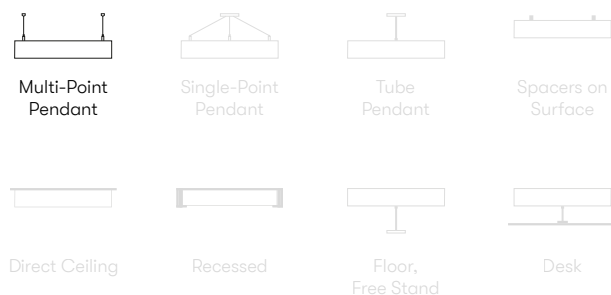

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com