

GENERAL DATASHEET

ANNA INVERSE



TECHNICAL DESCRIPTION

Anna Inverse luminaires. Direct-Indirect light distribution. Standard opal diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant, Spacers on Surface or Wall-mounted. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver is external, optionally switchable, dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K or 4000K. Binning $\leq$ MacAdam 3. Color rendering CRI>80, CRI>90.

PROFILES

Profile sizes (width x height):
15x32 mm, 20x47 mm, 20x62 mm

LIGHT

Luminaire type: LED

Diffuser: Standard Opal

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: 2700K, 3000K, 4000K

DIMENSIONS

Outer Diameter	Total Power	Total Light Output
Ø800 mm	58 W	5220 lm
Ø1000 mm	72 W	6480 lm
Ø1200 mm	87 W	7803 lm
Ø1500 mm	108 W	9720 lm
Ø1800 mm	130 W	11700 lm

LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

ELECTRICAL

Voltage: AC (230 volts)




BODY COLOR OPTIONS



LIGHTING TYPES



MOUNTING TYPES

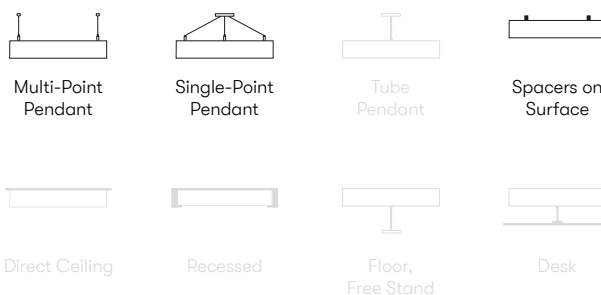

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com