

GENERAL DATASHEET

AUDREY



TECHNICAL DESCRIPTION

Audrey luminaires. Direct light distribution.
Standard opal or microprismatic diffuser.
Recessed mounting. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K, Tunable White (2700–6500K) or RGBW*. Binning \leq MacAdam 3. Color rendering CRI>80, CRI>90.

PROFILES

Profile heights: 75 mm, 100 mm

LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: 2700K, 3000K, 4000K, Tunable White

DIMENSIONS

Outer Diameter	Total Power	Total Light Output
Ø315 mm	23 W	1900 lm
Ø415 mm	36 W	3300 lm
Ø615 mm	60 W	5500 lm
Ø815 mm	80 W	7500 lm
Ø1015 mm	100 W	9300 lm


LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Not available

ELECTRICAL

Voltage: AC (230 volts)

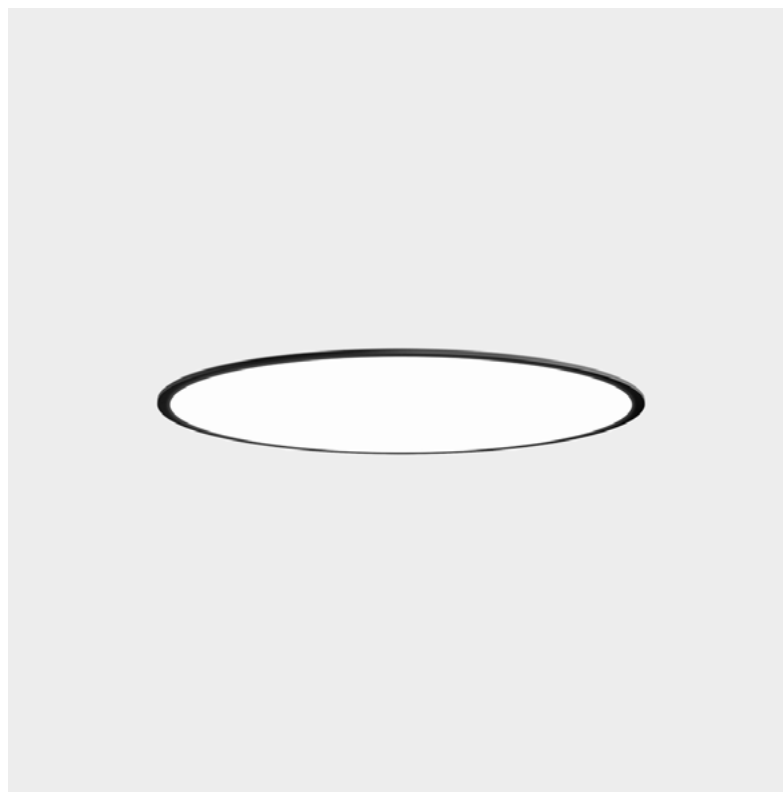


BODY COLOR OPTIONS



LIGHTING TYPES



MOUNTING TYPES

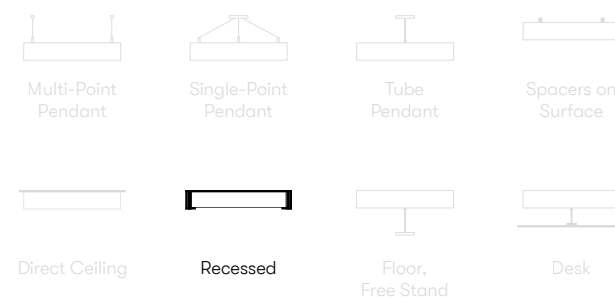

* Only available with certain profile size(s). Please reach out to our colleagues.

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.
© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com