

# GENERAL DATASHEET

## DARCY



### TECHNICAL DESCRIPTION

Darcy luminaires. Direct light distribution.  
Standard opal or microprismatic diffuser.  
Recessed mounting. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K, Tunable White (2700–6500K) or RGBW. Binning  $\leq$  MacAdam 3. Color rendering CRI>80, CRI>90.

### PROFILES

Profile sizes (width x height):  
75x75 mm, 100x100 mm

### LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: RGBW, 2700K, 3000K, 4000K, Tunable White

### DIMENSIONS

Outer Length	Total Power	Total Light Output
1000 mm	23 W	2576 lm


### LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Not available

### ELECTRICAL

Voltage: AC (230 volts)

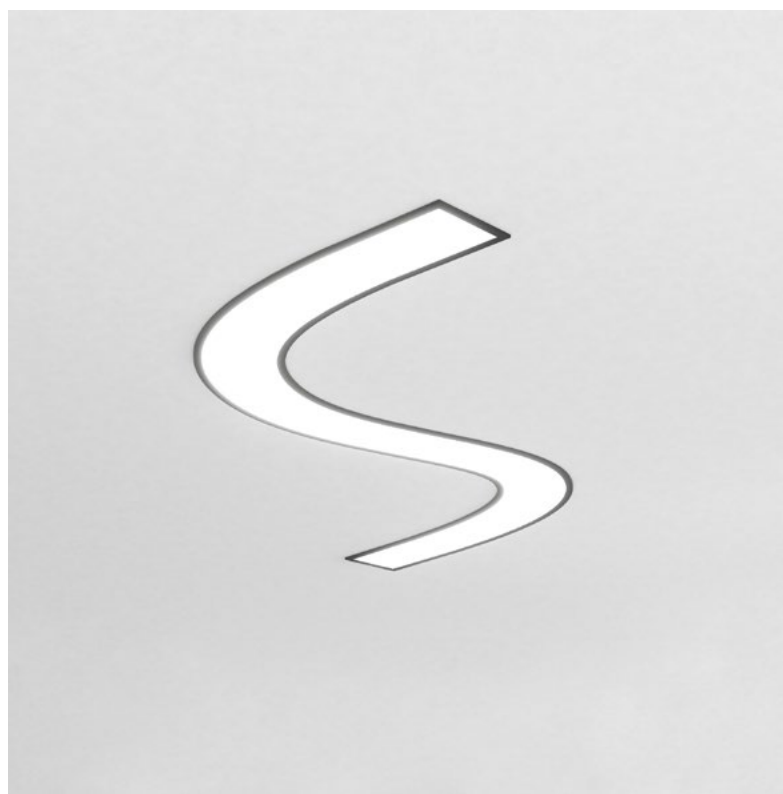


### BODY COLOR OPTIONS



### LIGHTING TYPES



### MOUNTING TYPES

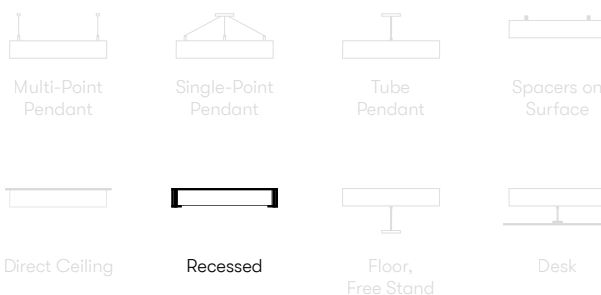

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.  
© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · [www.pontlight.com](http://www.pontlight.com)