

# GENERAL DATASHEET

## MILIA



### TECHNICAL DESCRIPTION

Milia luminaires. Direct, Direct-Indirect or Indirect light distribution. Standard opal or microprismatic diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant, Tube Pendant, Direct Ceiling or Spacers on Surface. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver integrated into luminaire housing, optionally switchable, dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K, Tunable White (2700–6500K) or RGBW\*. Binning  $\leq$  MacAdam 3. Color rendering CRI>80, CRI>90.

### PROFILES

Profile heights: 75 mm, 100 mm

### LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: RGBW\*, 2700K, 3000K, 4000K, Tunable White

### DIMENSIONS

Outer Dimensions	Total Power	Total Light Output
600x600 mm	60 W	7500 lm
880x880 mm	80 W	10000 lm
1160x1160 mm	100 W	12500 lm

### LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

### ELECTRICAL

Voltage: AC (230 volts)




### BODY COLOR OPTIONS



### LIGHTING TYPES



### MOUNTING TYPES

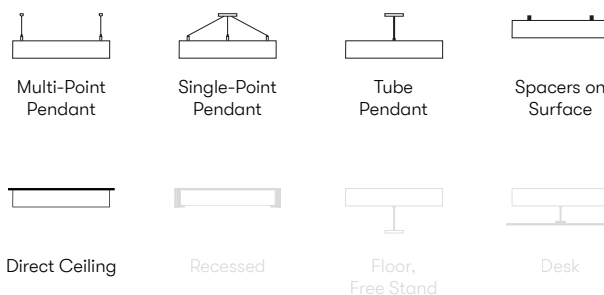

\*Only available with certain profile size(s). Please reach out to our colleagues.

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and subject to change. Definitive values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.  
© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · [www.pontlight.com](http://www.pontlight.com)