# GENERAL DATASHEET

## **OLENA**



#### **TECHNICAL DESCRIPTION**

Olena luminaires. Direct or Direct-Indirect light distribution. Standard opal or microprismatic diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant, Direct Ceiling or Spacers on Surface. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver is integrated into luminaire housing or external (profile sizes 40x35 mm, 55x50 mm, 75x75 mm), optionally switchable, dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K, Tunable White (2700−6500K)\* or RGBW\*. Binning ≤ MacAdam 3. Color rendering CRI>80, CRI>90.

## **PROFILES**

Profile sizes (width x height): 40x35 mm (direct-only light), 55x50 mm, 75x75 mm, 75x85 mm, 75x100 mm, 100x200 mm

#### LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: RGBW\*, 2700K, 3000K,

4000K, Tunable White\*

#### **DIMENSIONS**

Outer Diameter	Total Power	Total Light Output
Ø450 mm **	33 W	3828 lm
Ø600 mm **	43 W	4988 lm
Ø750 mm **	54 W	6264 lm
Ø1000 mm	72 W	8352 lm
Ø1200 mm	87 W	10092 lm
Ø1500 mm	108 W	12528 lm
Ø1800 mm	130 W	15080 lm
Ø2000 mm	145 W	16820 lm

## **LUMINAIRE BODY**

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cabels: Custom length and type of suspension cabels can be requested.

## **ELECTRICAL**

Voltage: AC (230 volts)





## **BODY COLOR OPTIONS**














## LIGHTING TYPES

Special Color RAL Color



## **MOUNTING TYPES**

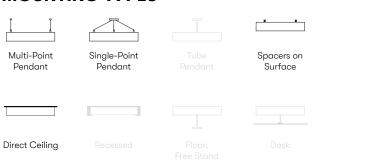

<sup>\*</sup> Only available with certain profile size(s). Please reach out to our colleagues.

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com

<sup>\*\*</sup> Profile size "100x200 mm" is available with Body size "Ø800 mm" and not available with "Ø750 mm" or other smaller sizes. Total Power and Total Light Output calculations may differ.