

GENERAL DATASHEET

OLLIE



TECHNICAL DESCRIPTION

Ollie luminaires. Direct or Direct-Indirect light distribution. Standard opal or microprismatic diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant, Spacers on Surface, Direct Ceiling. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver is integrated into luminaire housing or external (profile sizes 60x50 mm, 75x75 mm), optionally switchable or dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K or Tunable White (2700–6500K)*. Binning \leq MacAdam 3. Color rendering CRI>80, CRI>90.

PROFILES

Profile sizes (width x height):
60x50 mm, 75x75 mm, 75x100 mm

LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: 2700K, 3000K, 4000K, Tunable White*

DIMENSIONS

Outer Dimensions	Total Power	Total Light Output
1200x600 mm	67 W	7504 lm
1800x900 mm	100 W	11200 lm
2000x1000 mm	111 W	12432 lm

LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

ELECTRICAL


Voltage: AC (230 volts)




BODY COLOR OPTIONS



LIGHTING TYPES

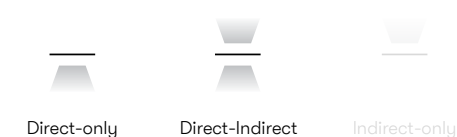

MOUNTING TYPES

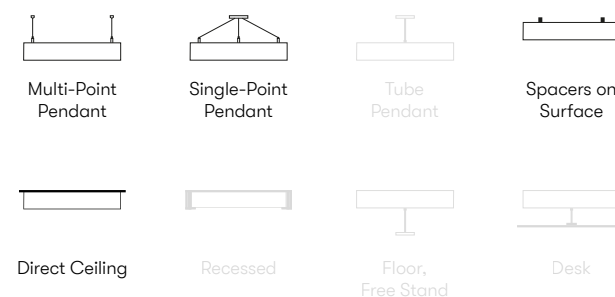

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and may vary. Final values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com