

GENERAL DATASHEET

PAULA



TECHNICAL DESCRIPTION

Paula luminaires. Direct, Direct-Indirect or Indirect light distribution. Standard opal or microprismatic diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant, Spacers on Surface, Direct Ceiling. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver is external, optionally switchable or dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K, 4000K, Tunable White (2700–6500K) or RGBW. Binning \leq MacAdam 3. Color rendering CRI>80, CRI>90.

PROFILES

Profile sizes (width x height):
75x75 mm, 75x100 mm

LIGHT

Luminaire type: LED

Diffuser: Standard Opal, Microprismatic

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: RGBW, 2700K, 3000K, 4000K, Tunable White

DIMENSIONS

Outer Dimensions	Total Power	Total Light Output
670x670 mm	62 W	6944 lm
950x950 mm	87 W	9744 lm
1230x1230 mm	113 W	12656 lm

LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

ELECTRICAL

Voltage: AC (230 volts)




BODY COLOR OPTIONS



LIGHTING TYPES



MOUNTING TYPES

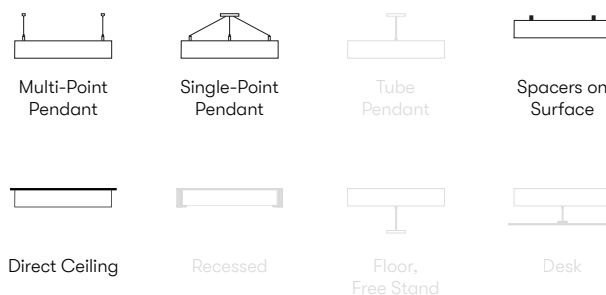

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and subject to change. Definitive values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · www.pontlight.com