

# GENERAL DATASHEET

## ANNA RECTANGLE



### TECHNICAL DESCRIPTION

Anna Rectangle luminaires. Direct-Indirect light distribution. Standard opal diffuser. Mounting types are Multi-Point Pendant, Single-Point Pendant or Spacers on Surface. Luminaire body surface in white, black, grey, anthracite, or custom RAL colors. Further Pont Light Selected Special Colors are also available. Driver is external, optionally switchable, dimmable (DALI, Push-Dim, Bluetooth). Color temperature 2700K, 3000K or 4000K. Binning  $\leq$  MacAdam 3. Color rendering CRI>80, CRI>90.

### PROFILES

Profile sizes (width x height): 15x32 mm, 20x47 mm

### LIGHT

Luminaire type: LED

Diffuser: Standard Opal

Control: ON-OFF, DALI, Push-Dim, Bluetooth

Beam Angle: Diffuse 110°

Color Temperature: 2700K, 3000K, 4000K



### DIMENSIONS

Outer Dimensions	Total Power	Total Light Output
800x800 mm	64 W	5760 lm
1000x1000 mm	80 W	7200 lm
1200x1200 mm	96 W	8640 lm
1500x1500 mm	120 W	10800 lm

### LUMINAIRE BODY

Material type: Aluminum, PMMA

Acoustic panel: Custom solutions available

Suspension cables: Custom length and type of suspension cables can be requested.

### ELECTRICAL

Voltage: AC (230 volts)




### BODY COLOR OPTIONS



### LIGHTING TYPES



### MOUNTING TYPES

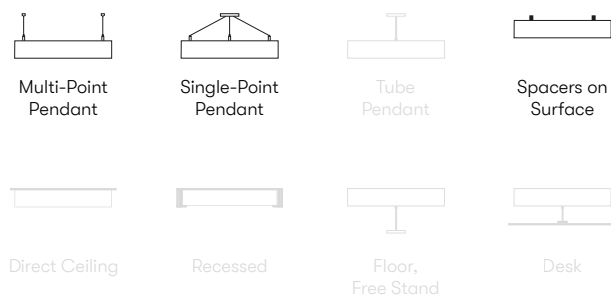

The technical data values for luminous flux, electrical connected load, and colour temperature are indicative and subject to change. Definitive values can be confirmed by our representative upon request. No liability is assumed for typographical or printing errors. General terms and conditions of Pont Light Kft. apply.

© Pont Light Kft. · Nagyszombat utca 1. · 1036 Budapest · Hungary · [www.pontlight.com](http://www.pontlight.com)